


Datasheet: SMT-131


Touch screen Wall mounted Controller

| Job Name: | | Location: | |
|---|-------------------------------------|--|---------------------------------|
| Purchaser: | | | |
| Engineer: | | | |
| Submitted To: | | For | Reference Approval Construction |
| Submitted By: | | Date: | |
| Unit Designation: | Schedule #: | Model No.: | |
| | | | |
| Features: | | | |
| Fan coil or Heat pump control 1 or 3 speed fan control On/Off or 0-10VDC heat/cool control 24VAC power supply TFT screen Modbus RTU network communication On screen parameters set 2 or 4 pipe system select Internal room temperature sensor | | Conditioning is off A | |
| Power | | | |
| Power Supply: | 24 Vac/Vdc | | |
| Power Consumption: 0.5A | | | |
| | | | |
| Operating Conditions | | | |
| Surrounding-10° C to +50° CTemperature Limits:+14 F to +122 F | | | |
| Humidity (%) 0% to 80% | | | |
| Dimensions (H x W x D) 0.75 x 7.8 x 4.72 / | | | |
| (inches/mm) 113 x 103 x 25mm | | | |
| Weight (lbs/kg) 0.26/0.12 | | | |
| Maximum PBUS wiring length (ft/m) 2600/800 | | | |
| Communication and connectivity | | | |
| RS485 | 2 wire, shielded, polarized, 24 AWG | twisted pair 20- | |

CoolAutomation products are subject to continuous improvements. CoolAutomation reserves the right to modify product design, specifications and information in this datasheet without notice and without incurring any obligations.

Detailed drawing:

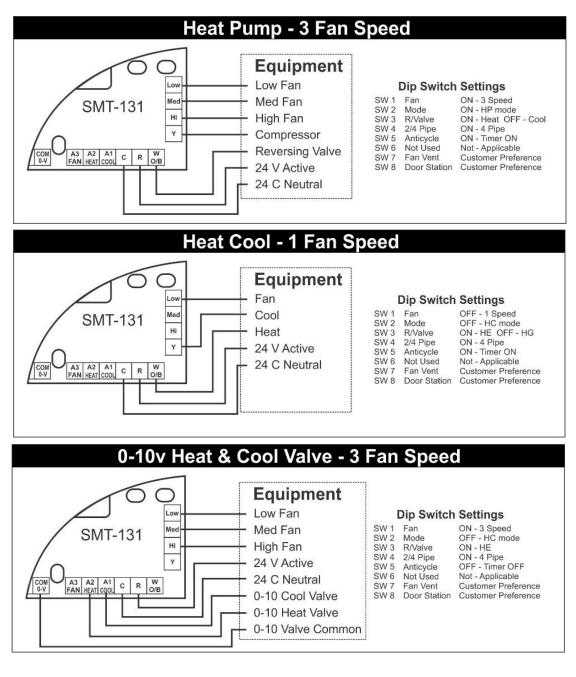



CoolAutomation products are subject to continuous

in this datasheet without notice and without incurring any obligations.

right to modify product design, specifications and information