

CPH-TRIO


The CPH-Trio amp is equipped with some simple but very handy filters, such as the Artcoustic ASOF sub frequency EQ filter and a flat shelve treble filter, combined with easy-to-use volume and gain controls. It comes with an efficient and easy-to-use digital crossover, ensuring perfect acoustic integration.

Full range: 20 Hz - 20 KHz \pm 1 dB
 Sub Low-pass Filter: 80 Hz 24 dB/oct (fixed)
 High-pass Filter: 100 Hz 24 dB/oct & 120 Hz 24 dB/oct
 S/N Ratio: >BT : 105 dB Input 1/2 96 dB
 THD (at 1 watt into 4 ohms) 1KHz < / RCA 0.003% 0.002% 0.001%
 Input sensitivity: RCA 1.5 Vrms, BT / COAX 0 dB
 RS232: firmware and control
 Dimensions: H: 180 W: 127 D: 48 mm
 Weight: 0.8 Kg




PANEL LAYOUT

Front panel layout

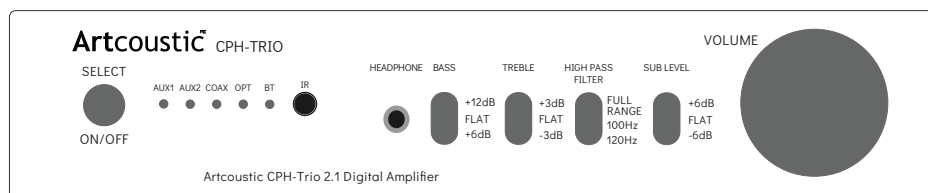

Rear panel layout

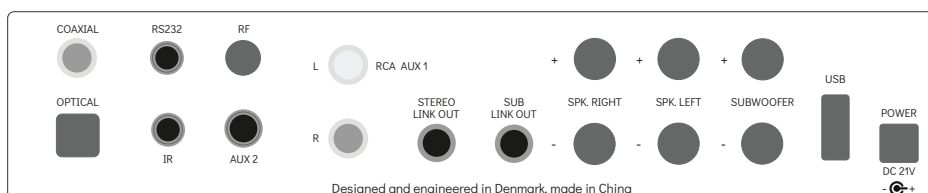

POWER PROFILE

STEREO

8 Ω
 30W+30W

SUBWOOFER

8 Ω
 50W