



## Maximum Power, Ultimate Control: Meet the 800 Series

WattBox 800 Series IP power conditioners come in professional-grade 6-, 8-, and 12-outlet models and feature individual outlet metering, surge protection, and power conditioning to cut down on service calls and protect your investment.

### Outlet Controls

RESET ALL OUTLETS



1 Outlet 1



2 Outlet 2


### Stay Connected

800 Series WattBox devices provide current and voltage readings for each outlet for advanced troubleshooting capabilities. If your service gets interrupted for any reason, your pro can remotely troubleshoot and get you back online quickly—often before you even know there's an issue.



### Stress Less

Your 800 Series WattBox offers surge protection and even automatically disconnects in unsafe voltage conditions. These features keep your equipment from failing and provide critical protection for both your gear and your files.

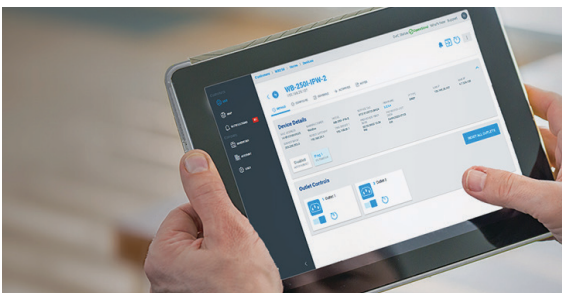

### Take Charge

OvrC continuously monitors your internet connection and reboot if needed, keeping you connected. Plus, with the OvrC Connect app, you're empowered to take matters into your own hands and reset one or multiple devices with the click of a button.

	800 IPVM Series			800 Series Accessory
Models	WB-800I-IPVM-6	WB-800ICH1U-IPVM-8	WB-800IVPS-IPVM-12	WB-800I-FP
Number of Outlet Options	6	9 - 1 on front, 8 on back	12	1 on front
# of IP Outlet Control	6	8 (Rear Outlets Only)	12	0
USBs				4 ports, 1.5A each 6A, 30W Total
Individual Outlet Metering	●	Rear Outlets Only (8)	●	
Ethernet Connectivity	●	●	●	
WiFi Enablement				
Product Size	440*44*80 (mm)	440*44*312 (mm)	790*44*80 (mm)	440*44*82 (mm)
AC Input Connection	IEC 60320 C14	IEC 60320 C14	IEC 60320 C14	IEC 60320 C14
Line Voltage	220`240VAC, 50/60 Hz	220`240VAC, 50/60 Hz	220`240VAC, 50/60 Hz	220`240VAC, 50/60 Hz
Circuit Breaker/Fuse Rating	10A, 250VAC	10A, 250VAC	10A, 250VAC	
Power Rating	2400W	2400W	2400W	
Surge Component	Metal Oxide Varistor (MOV)	Metal Oxide Varistor (MOV)	Metal Oxide Varistor (MOV)	
Current Rating	10A	10A	10A	
Voltage Protection Rating	L-N 1.1 kV, L-E 2.1 kV, N-E 1.8 kV	L-N 900 V, L-E 1.9 kV, N-E 1.7 Kv	L-N 1.0 kV, L-E 1.8 kV, N-E 1.6 Kv	
Surge Joule Rating	1260J	3780J	2520J	
Noise Filtration EMI/RF		●	●	
Safe Voltage	●	●	●	●
Certifications	CE Certified RCM Certified CB Safety Certified	CE Certified RCM Certified CB Safety Certified	CE Certified RCM Certified CB Safety Certified	CE Certified RCM Certified CB Safety Certified
Detachable IEC Power Cord	●	●	●	●
Volt/ Amp FacePlate		●		●
Remote Firmware Upgrades	●	●	●	●
Self-healing Auto-Reboot	●	●	●	
Scheduled Power Cycles	●	●	●	
Remote Management	●	●	●	●
Mobile End-User App	●	●	●	●
Local Control API	●	●	●	●