

The ES-LS-MOUNT-BOX for Episode® Landscape Speakers is a PVC direct-burial wiring solution that may be used with PVC electrical conduit or direct burial speaker cable. The weatherized wire nuts and optional extensions allow for mounting in nearly any outdoor location.

Included:


- (1) ES-LS-MOUNT-BOX
- (1) Box Cover
- (2) Extension Sleeves
- (4) Aluminum Ground Stakes
- (8) Stainless Steel Cover Screws

Recommended:

- PVC Glue- for PVC conduit or fittings
- Silicone Caulk
- Shovel
- Hammer
- #2 Philip's Screwdriver
- Drill


Installation Instructions

1. Dig trenches and route the speaker cable or conduit to the speaker location. Dig a hole for the box 3 to 6 inches deep and level the bottom of the hole.

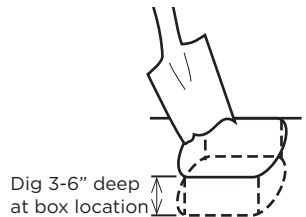


- 2a. **PVC Connection-** Knock out the openings to be used with a screwdriver and glue the conduit and box together. Route the cable through the conduit and pull at least 8 inches of cable into the box cavity.

Note: The openings in the box are for 3/4" conduit but other sizes may be used with adapters.

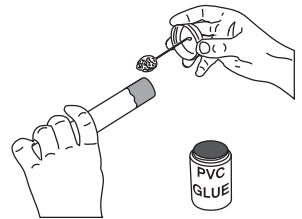

- 2b. **Direct Burial Cable-** Drill a hole into the center of the knock out slightly larger than the cable. Route the cable through and pull at least 8 inches of cable into the box cavity. Seal the entrance completely with silicone.

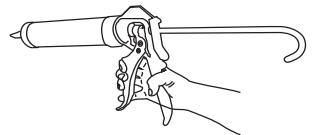



Important! Ensure all PVC connections are securely glued. Use silicone caulk to seal any openings used for cable. Allow caulk and glue to dry completely before burying the box.

(Instructions continued on next page)

Installation Instructions (Cont'd)

3. Install the loudspeaker to the box cover. Use the extensions to raise the speaker as needed. Use silicone in the coupler threads to enhance sealing of the box against moisture.
4. Use the weatherproof wire nuts included with the speaker to terminate the wiring connections. Turn the wire nuts clockwise by hand until they are tight.
5. The box may now be closed. A weatherproof gasket is attached to the cover, but for additional water intrusion protection, line the inside edge of the cover with silicone where it contacts the box, then assemble the box using the 8 screws. Tighten the screws tightly by hand with a #2 screwdriver.
6. Stake the box down in the hole securely using the 4 stakes. Install all speakers and test the system before burying the boxes and wiring.
7. Adjust the speaker angle and position last.

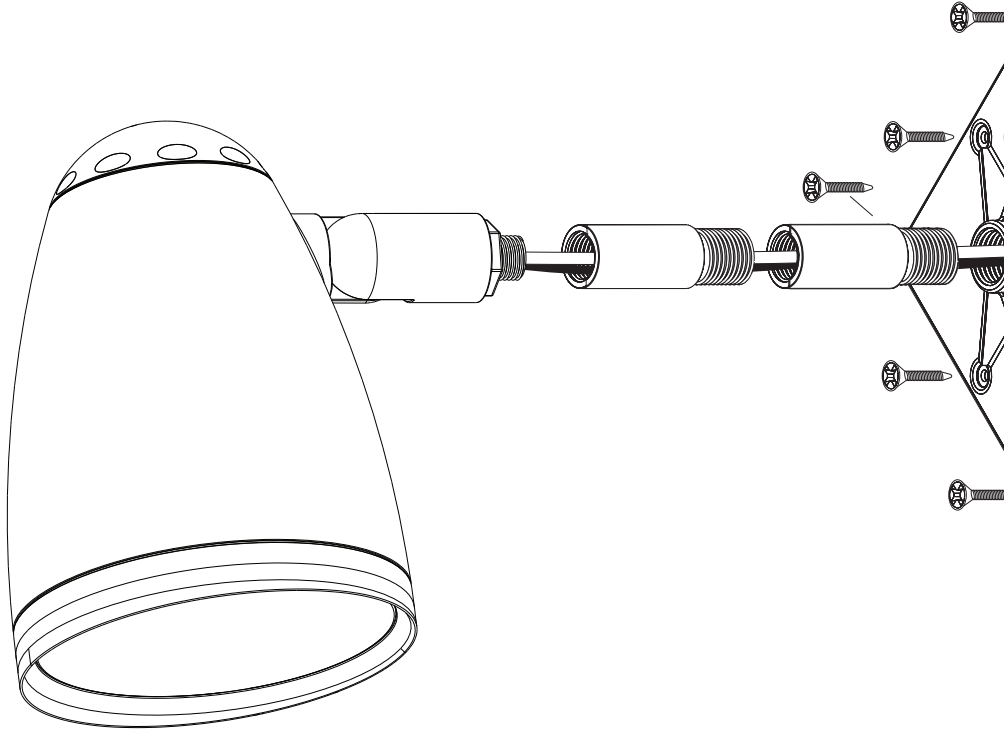

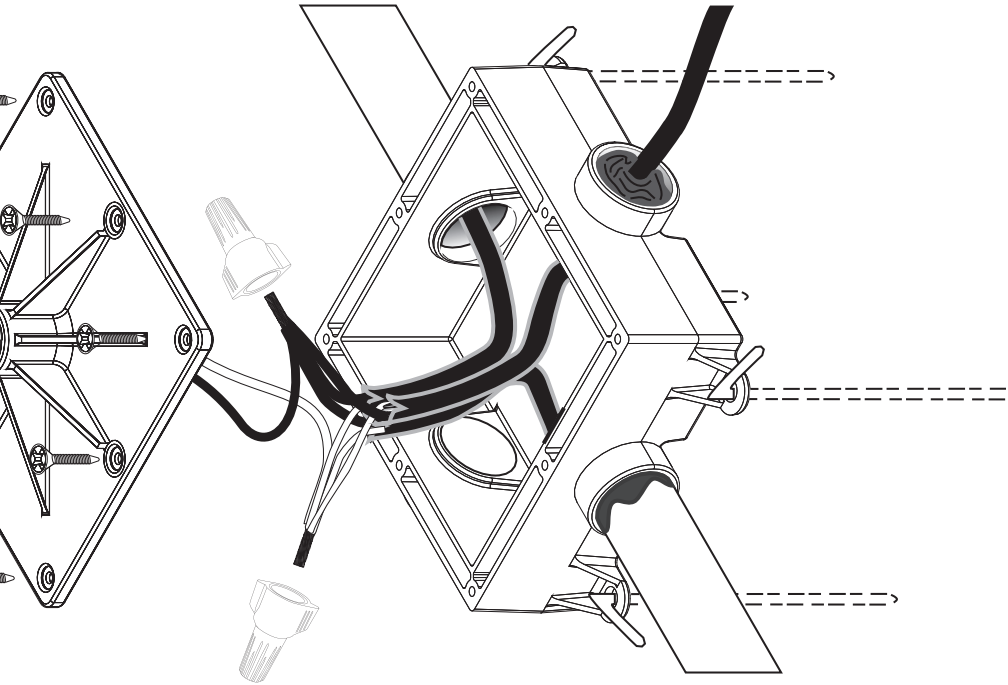

Lifetime Limited Warranty

All Episode Speaker Products have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

e p i s o d e®

engineered by
Snap
av

140304-1200