

SL ARCHITECT 2-1


The smallest model in the in-ceiling, in-wall line up.
The SL Architect 2-1 is the perfect solution for multi-room applications, commercial installations, bars, restaurants, hotel lobby's etc. And as well as the perfect choice for Dolby Atmos effect speakers in Artcoustic cinema systems.

Operating Range: 80 Hz (-3 dB) to 40 kHz
Sensitivity: 93 dB
Maximum Power Handling 2 hours of 6 dB crest factor pink noise, 60 Watt RMS (AES Standard)
Impedance: 4 ohms nominal
Average Peak SPL: 110 dB
Weight: 1.8 kg
Dimensions: H: 240 W: 240 D: 74 mm
Cabinet: Black, White, RAL, NCS
Screen: Black, White, RAL, NCS




SCHEMATICS


dimensions are in mm



front view

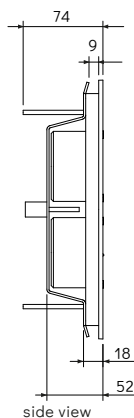

side view

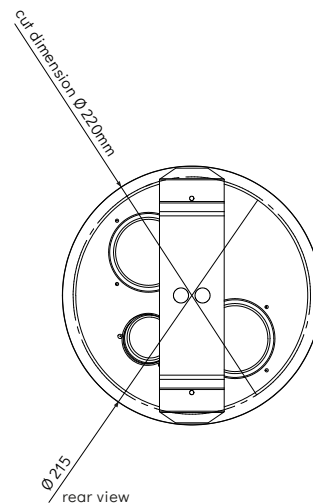


rear view


POLAR RESPONSE

horizontal polar response 1m

16000Hz -----
6500Hz ----
2500Hz ---
1000Hz ——

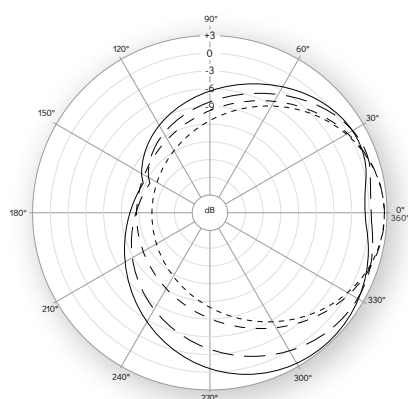

vertical polar response 1m

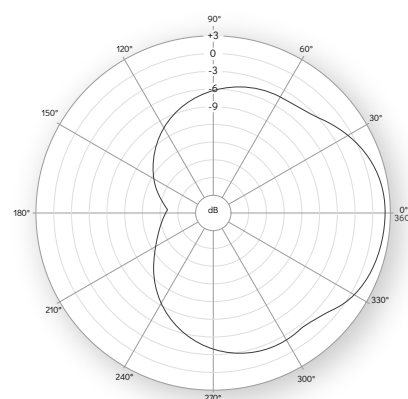

3D polar response 1m

