


ARCHITECTURAL SPEAKERS

IN-CEILING CUTOUT DIMENSIONS

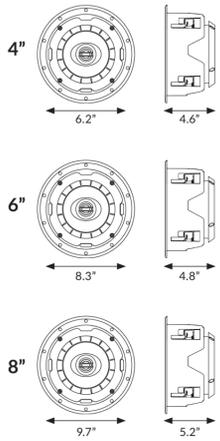

IN-CEILING

Episode Impression in-ceiling speakers allow dealers to work side-by-side with interior designers to provide excellent total-home sound. These 4" speakers utilize a small footprint to deliver amazing audio that blends right in.

SKU	ES-IM4-IC	ES-IM6-BP-SUB
Sensitivity	85 dB SPL	87 dB SPL
Freq. Response	70 Hz - 20 kHz	40 Hz - 125 Hz
Specialties	Small Aperture	Small Aperture
Sold As	Single	Single


KIT-ES-IM2.1-IC-SYS



KIT-ES-IM4.1-IC-SYS



IN-WALL CUTOUT DIMENSIONS

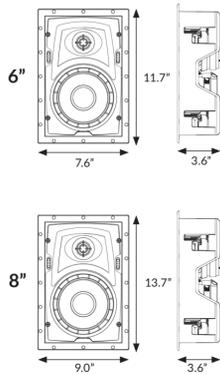

CORE 1 Series

The CORE 1 series features a vacuum-formed polypropylene woofer and mylar dome tweeter for impeccable clarity and punchy bass.

SKU	ES-CORE-16-IC	ES-CORE-18-IC
Sensitivity	87dB	89dB
Freq. Response	54Hz - 20kHz	48Hz - 20kHz
Specialties	General	General
Sold As	Pair	Pair

CORE 3 Series

The CORE 3 series features a vacuum-formed polypropylene woofer and fabric dome tweeter for a smooth frequency response and high-performance bass.

SKU	ES-CORE-36-IC	ES-CORE-36-AW-IC	ES-CORE-36-IC-DVCS	ES-CORE-36-AW-IC-DVCS	ES-CORE-36-IC-POINT	ES-CORE-38-IC	ES-CORE-38-AW-IC	ES-CORE-38-IC-DVCS	ES-CORE-38-AW-IC-DVCS
Sensitivity	89dB	89dB	88dB	88dB	90dB	90dB	90dB	89dB	89dB
Freq. Response	52Hz - 20kHz	52Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	52Hz - 20kHz	45Hz - 20kHz	45Hz - 20kHz	43Hz - 20kHz	43Hz - 20kHz
Specialties	General	All-Weather	Surround / Single Point Stereo	All-Weather / Surround / Single Point Stereo	Point	General	All-Weather	Surround / Single Point Stereo	All-Weather / Surround / Single Point Stereo
Sold As	Pair	Pair	Each	Each	Each	Pair	Pair	Each	Each

CORE 5 Series

The CORE 5 series features an injection-molded polypropylene cone and Teteron dome tweeter for an audible difference in sound performance with increased audio dispersion.

SKU	ES-CORE-56-IC	ES-CORE-56-AW-IC	ES-CORE-56-IC-DVCS	ES-CORE-56-AW-IC-DVCS	ES-CORE-56-IC-POINT	ES-CORE-58-IC	ES-CORE-58-IC-DVCS
Sensitivity	90dB	90dB	89dB	89dB	91dB	90dB	90dB
Freq. Response	52Hz - 20kHz	52Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	52Hz - 20kHz	45Hz - 20kHz	43Hz - 20kHz
Specialties	General	All-Weather	Surround / Single Point Stereo	All-Weather / Dual Voice Coil	Point	General	Surround / Single Point Stereo
Sold As	Pair	Each	Each	Each	Each	Pair	Each

IN-WALL

SKU	ES-CORE-16-IW	ES-CORE-36-IW	ES-CORE-36-IW-LCR	ES-CORE-56-IW	ES-CORE-56-IW-LCR
Sensitivity	87dB	89dB	90dB	90dB	91dB
Freq. Response	50Hz - 20kHz	50Hz - 20kHz	49Hz - 20kHz	48Hz - 20kHz	46Hz - 20kHz
Specialties	General	General	LCR	General	LCR
Sold As	Pair	Pair	Each	Pair	Each

PERFORMANCE LEVEL

- Core 1 Series**
Woofer: Polypropylene
Tweeter: Mylar
- Core 3 Series**
Woofer: Vacuum-formed Polypropylene
Tweeter: Silk Dome
- Core 5 Series**
Woofer: Injected Molding Polypropylene
Tweeter: Teteron Dome
- Signature 3 Series**
Woofer: Polypropylene
Tweeter: Silk dome

- Signature 5 Series**
Woofer: Polypropylene with vapor deposit titanium
Tweeter: Silk dome with vacuum-deposited titanium
- Signature 7 Series**
Woofer: Honeycomb fiberglass nomex
Tweeter: Pure titanium

- HT700**
Woofer: Paper with Kevlar cone (NCS)
Tweeter: Titanium catenary dome

- HT900**
Woofer: Paper with Kevlar cone (NCS)
Tweeter: High-performance ribbon tweeter dome


FLUSH MOUNTS

A magnetic, thin-bezel, paintable grille keeps the speaker out of sight for a smooth, minimalistic finish.



BRACKETS

Episode speaker brackets make installing your favorite Episode speakers quick and easy. They were engineered with a unique, quick-connect design and raised mud ring for a clear cut.

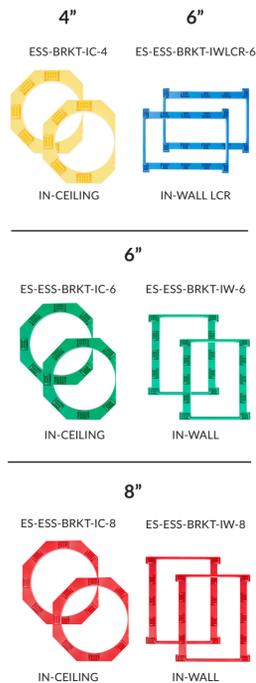

IN-CEILING

3 Series

Our 3 Series is anything but entry level. A polypropylene woofer and silk dome tweeter deliver all-purpose performance for any room.

5 Series

Kick your audio install up a notch with the 5 Series, crafted with a polypropylene woofer and adjustable, silk dome tweeter - both with vacuum-deposited titanium.

7 Series

If you're a true audiophile, opt for the 7 Series. A honeycomb fiberglass Nomex woofer and pure titanium tweeter for audiophile applications offers the best in distributed audio or home theater sound.

Engineered with a scientific focus, Signature by Episode provides high-performance sound through low distortion, wide dispersion, and flat frequency response. Plus, they feature Push-Lock™ technology and a one- or two-step install option for unparalleled versatility.



SKU	SIG-34-IC	SIG-36-IC	SIG-36-AW-IC	SIG-36-AW-ICDVC	SIG-36-ICDVC	SIG-36-POINT	SIG-38-IC
Sensitivity	89dB	89dB	89dB	89dB	90dB	91dB	90dB
Freq. Response	57Hz-20kHz	43Hz-20kHz	43Hz-20kHz	43Hz-20kHz	43Hz-20kHz	43Hz-20kHz	36Hz-20kHz
Specialties	none	none	All Weather	All Weather	Dual Voice Coil	Point	none
Sold As	Single	Single	Single	Single	Single	Single	Single

SKU	SIG-54-IC	SIG-56-IC	SIG-56-ICDVC	SIG-56-ICSURR	SIG-56-POINT	SIG-58-IC	SIG-58-ICDVC	SIG-58-ICSURR
Sensitivity	90dB	90dB	90dB	89dB	90dB	90dB	90dB	90dB
Freq. Response	55Hz-20kHz	42Hz-20kHz	42Hz-20kHz	42Hz-20kHz	42Hz-20kHz	36Hz-20kHz	36Hz-20kHz	36Hz-20kHz
Specialties	none	none	Dual Voice Coil	Surround	Point	none	Dual Voice Coil	Surround
Sold As	Single	Single	Single	Single	Single	Single	Single	Single

SKU	SIG-76-IC	SIG-76-ICSURR	SIG-76-POINT	SIG-78-IC	SIG-78-ICSURR
Sensitivity	90dB	90dB	90dB	91dB	91dB
Freq. Response	41Hz-20kHz	41Hz-20kHz	41Hz-20kHz	32Hz-20kHz	32Hz-20kHz
Specialties	none	Surround	Point	none	Surround
Sold As	Single	Single	Single	Single	Single

IN-WALL

SKU	SIG-36-IW	SIG-36-IWDVC	SIG-38-IW	SIG-56-IW	SIG-56-IWSURR	SIG-56-IWDVC	SIG-56-IWLCR	SIG-58-IW
Sensitivity	89dB	90dB	90dB	90dB	89dB	90dB	89dB	90dB
Freq. Response	43Hz-20kHz	43Hz-20kHz	36Hz-20kHz	42Hz-20kHz	42Hz-20kHz	42Hz-20kHz	42Hz-20kHz	36Hz-20kHz
Specialties	none	Dual Voice Coil	none	none	Surround	Dual Voice Coil	LCR	none
Sold As	Single	Single	Single	Single	Single	Single	Single	Single

SKU	SIG-76-IW	SIG-76-IWSURR	SIG-76-IWLCR	SIG-78-IW
Sensitivity	90dB	90dB	89dB	91dB
Freq. Response	41Hz-20kHz	41Hz-20kHz	41Hz-20kHz	31Hz-20kHz
Specialties	none	Surround	LCR	none
Sold As	Single	Single	Single	Single

CRADLES

Mount a grille or back box with no speaker present

- 4" - SIG-CRADLE-IC-4
- 6" - SIG-CRADLE-IC-6
- 8" - SIG-CRADLE-IC-8
- 6" - SIG-CRADLE-IW-6
- 8" - SIG-CRADLE-IW-8
- 6" LCR - SIG-CRADLE-IWLCR-6

GRILLES

A magnetic, thin-bezel, paintable grille keeps the speaker out of sight for a smooth, minimalistic finish.

Colors: Black, white
Shapes: Round, square, rectangular
Types: Thin-bezel, bezel-less



ENCLOSURES

Episode Signature back boxes effectively reduce sound propagation to adjacent rooms by up to 30dB while providing a smoother, more predictable performance. It also features a direct, jumper-less connection to the speaker to simplify installs.

Depth with Back Box

In-Ceiling	Depth	In-Wall	Depth
IC-4	5.9"	N/A	N/A
IC-6	6.2"	IW-6	3.8"
IC-8	6.6"	IW-8	3.8"

HOME THEATER SERIES

700 Series

The 700 home theater series features dual NCS woofers and a sealed MDF enclosure, making it perfect for in-wall, surround sound LCR installations.

SKU	ES-HT700-IWLCR-6	ES-HT700-ICLCR-5
Sensitivity	85dB	87dB
Freq. Response	63Hz-20kHz	48Hz-20kHz
Specialties	LCR	LCR
Sold As	Single	Single

900 Series

Our 900 series home theater tower speakers are designed to give you the best audio experience imaginable. A sealed MDF enclosure and unique, lightweight ribbon tweeter deliver best-in-class performance.

SKU	ES-HT900-IWLCR-6	ES-HT950-IWSURR-6	ES-HT950-IW-7
Sensitivity	89dB	89dB	87dB
Freq. Response	65Hz-40kHz	65Hz-40kHz	48Hz-40kHz
Specialties	LCR	Surround	Surround
Sold As	Single	Single	Single

BRACKETS

