

3G ULTRA 505POE Receiver

VBS-HDIP-505POE


Just Add
Power

All Audio Capable 1080p Receiver

The 505POE Receiver combines the enhanced audio and feature-set of the 3G Ultra system with the maximum 1080p resolution of 2G Omega devices.

In 3G Ultra systems, the 2GΩ/3G Receivers provide a lower-cost solution for sources that output 1080p resolution or lower.

The 505POE receives and processes a 1080p or lower-resolution source from a Just Add Power Transmitter and distributes video to the designated display; supports all lossless audio and HDCP 2.2; along with with all the 1080p Receiver system wide features from the 3G Ultra product line.

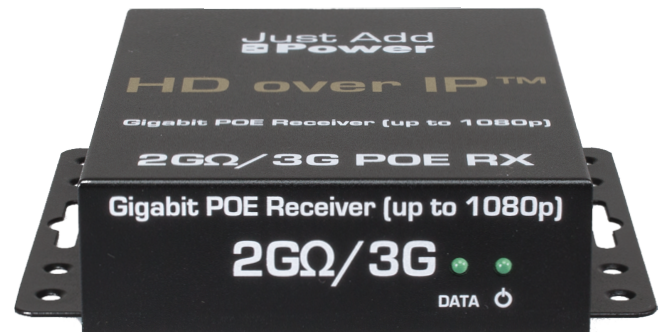

Features

HDCP 2.2	Display content with HDCP 2.2 copy/content protection on any HDMI screen in your system	Image Pull	Preview an image from any source or display, in any web browser or control system, at up to 10 fps
Image Pop	Display a custom logo or message as an overlay on any active screen	Scalability	Fully compatible with all 3G Ultra and 2G Omega products
Image Push	Load a custom default image or logo for when no source is displayed onscreen	Video Rotation	Rotate your video by 90° for portrait or landscape display

3G ULTRA 505POE Receiver

VBS-HDIP-505POE


Just Add
Power

Front of Device:



All measurements in millimeters (mm)

Back of Device:

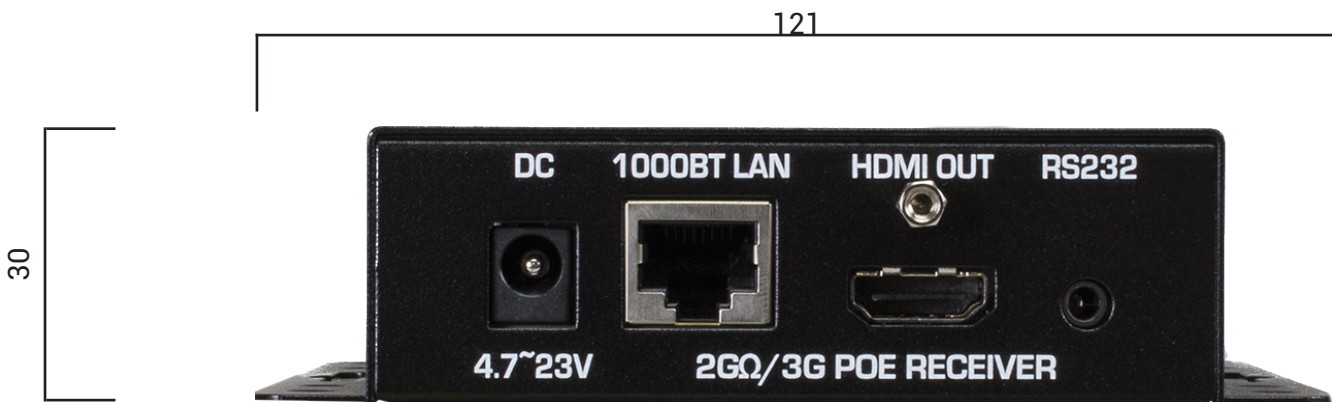

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI Out 3.5mm RS232 w/null modem
Dimensions & Weight	158 x 30 x 127 mm 6.2" x 1.2" x 5.0" inch 0.36 kg / 0.8 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 1920x1200 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		