

3G ULTRA 705POE Transmitter

VBS-HDIP-705POE

Just Add
Power

All Audio Capable 1080p Transmitter

The 705POE Transmitter combines the enhanced audio and feature-set of the 3G Ultra system with the maximum 1080p resolution of 2G Omega devices.

In 3G Ultra systems, the 2GΩ/3G Transmitters provide a lower-cost solution for sources that output 1080p resolution or lower.

The 705POE encodes a 1080p or lower-resolution source device into an IP signal and sends it over the network with ultra-low latency and instant switching; supports integrated endpoint control and all lossless audio; along with with all the 1080p Transmitter system wide features from the 3G Ultra product line.



Features


Audio	All lossless audio supported - including Dolby Atmos®	Image Pull	Preview an image from any source or display, in any web browser or control system, at up to 10 fps
HDCP 2.2	Display content with HDCP 2.2 copy/content protection on any HDMI screen in your system	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
		Scalability	Fully compatible with all 3G Ultra and 2G Omega products

3G ULTRA 705POE Transmitter


VBS-HDIP-705POE

Just Add
Power

Front of Device:

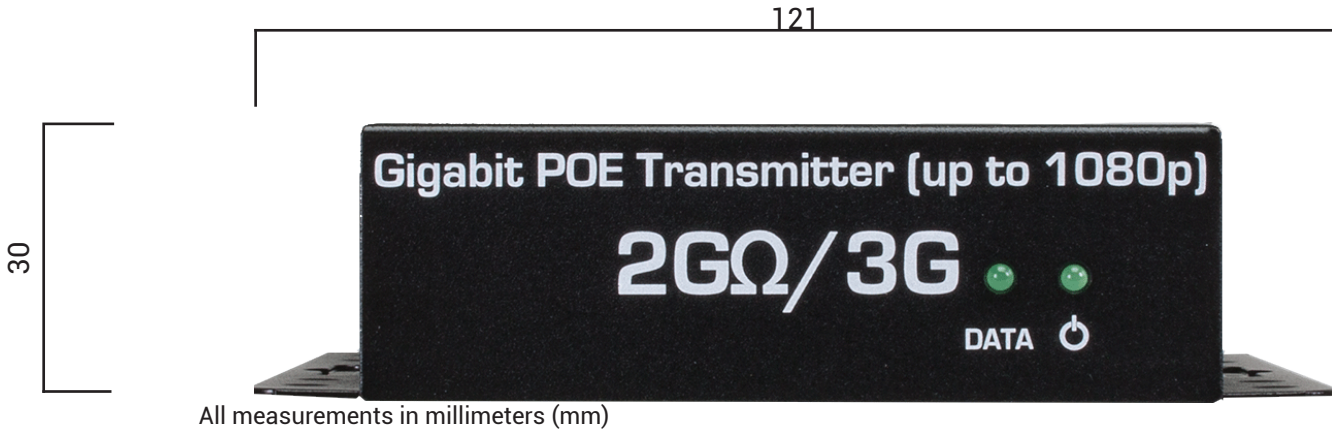

Back of Device:

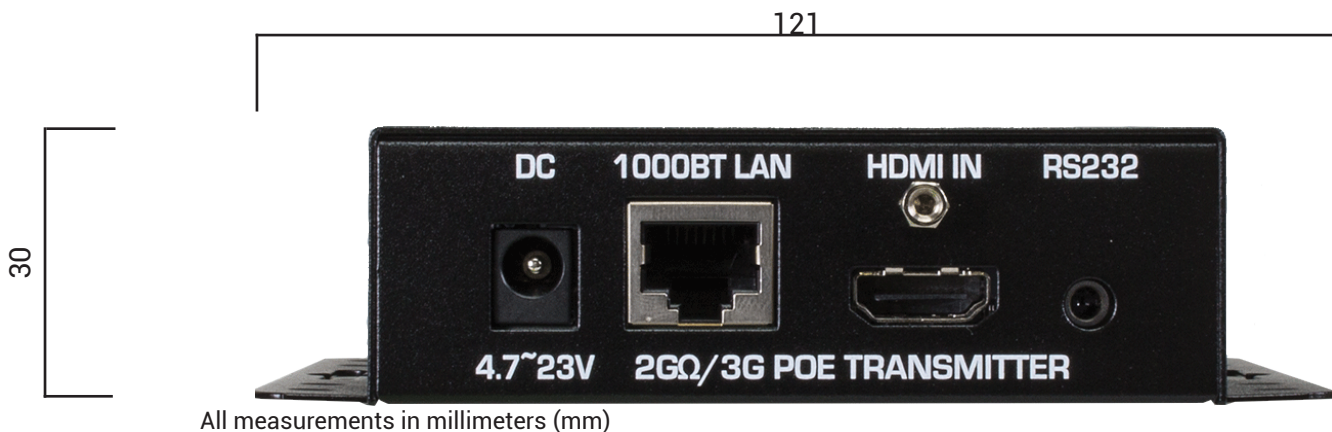

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI In 3.5mm RS232 w/null modem
Dimensions & Weight	121 x 30 x 125 mm 5.0" x 1.2" x 4.9" inch 0.27 kg / 0.6 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 1920x1200 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		