

SL ARCHITECT PAS SPL


The SL Architect 2-2 PAS has an impressive operating dynamic range -3 dB 70 Hz and extend to an impressive upper frequency response at 40 kHz. All matched with an exceptional Sound pressure at 114 dB. Making the SL Architect 2-2 PAS a true all-rounder, fitting a large portfolio of applications.

Operating Range: 80 Hz (-3 dB) to 40 kHz
 Sensitivity: 94 dB
 Maximum Power Handling 2 hours of 6 dB crest factor pink noise, 60 Watt RMS (AES Standard)
 Impedance: 4 ohms nominal
 Average Peak SPL: 114 dB
 Weight: 3.4 kg
 Dimensions: H: 300 W: 300 D: 153 mm
 Cabinet: Black, White, RAL, NCS
 Screen: Black, White, RAL, NCS



SCHEMATICS

dimensions are in mm

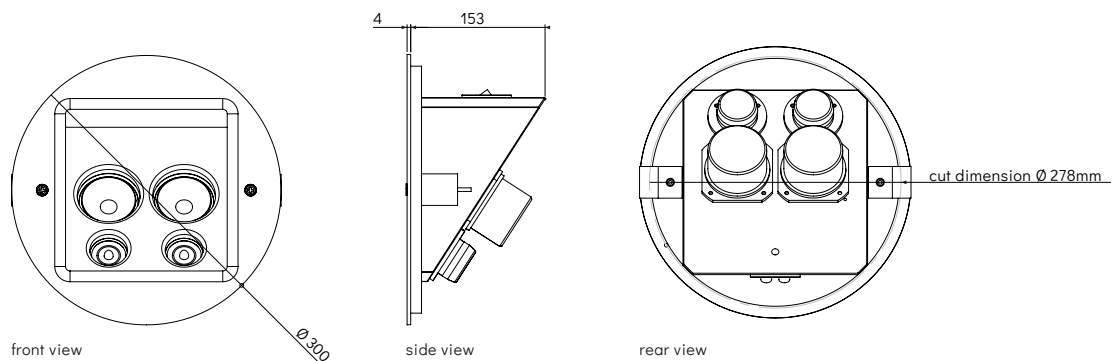

POLAR RESPONSE

horizontal polar response 2m

16000Hz -----
 6500Hz ----
 2500Hz ---
 1000Hz —

vertical polar response 2m

3D polar response 2m

