

VBS-HDIP-707WP2

Thin Wallplate Transmitter





The 3G Ultra 707WP2 Thin Wallplate Transmitter fits into a 2-gang construction box and provides an HMDI input to any Just Add Power video distribution system.

Thin profile for easy mounting.

Mix-and-match the 3G Ultra 707WP2 Transmiter with any 3G Ultra or 2G Omega models to distribute any source to any zone.


Features

Audio	All lossless audio supported	Image Pull Preview an image from any source or display,in any web browser or control system, at up to 10 fps	
Colors	Black, White or Custom		
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Scalability	Fully compatible with all 3G Ultra and 2G Omega products

3G ULTRA 707 Wallplate Transmitter


VBS-HDIP-707WP2

Front of Device:

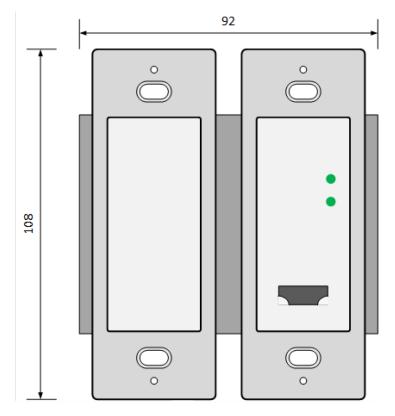

All measurements in millimeters (mm)

Side of Device:

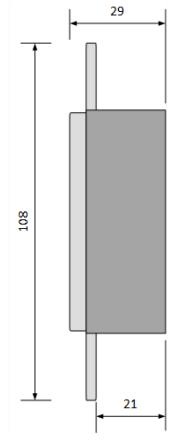

Specifications

Bandwidth 180-500 Mbps

Compliance HDCP 2.2 RoHS/FCC/CE

Dimensions & Weight 108 x 92 x 29 mm

4.3" x 3.6" x 1.1" inch

0.09kg / 0.2 lb

Encryption Hardware-Based AES 256-bit

Encryption of network video signal

Operating Temp 0-60 °C / 32-140 °F

POE 10 watts maximum

Ports Gigabit Ethernet

HDMI In

Power Supply ~4.7-23V

(not included) 5.5mm/2.1mm, Positive tip