

MZMA (6x4) 55

Multi Zone Matrix Amplifier



MADE IN BRITAIN

Product Code

SKU

MZMA6455 / 2.50.901

6 inputs / 4 outputs

55W/channel (42W all channels driven)

Hi-Fi All Analogue Design (AAD)

3-band EQ

Optimisable power management

3 Year Warranty with cloud registration

The Multi Zone Matrix Amplifier (MZMA) offers 4 stereo zones of 55W power in a 1U amplifier.

The perfect rack-amp partner for MHUB to deliver multi room, multi zone, amplified audio alongside video, all controllable via the uControl App, Remote or third-party control system.

Setup & control.

uOS web GUI



Manage all system settings, switch audio inputs and control volume/EQ states.



uControl (app/voice)



Downloaded over 10,000+ times, uControl is the easiest way to control MZMA.



uControl Remote

One remote for controlling all your HDANYWHERE system and more.

Specifications.

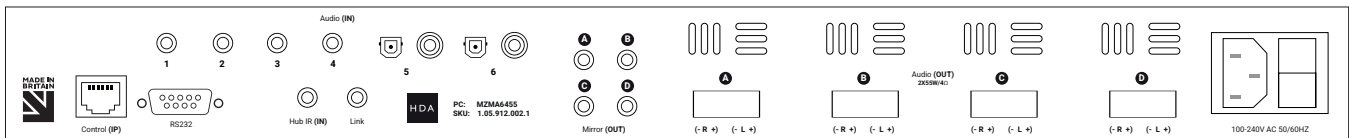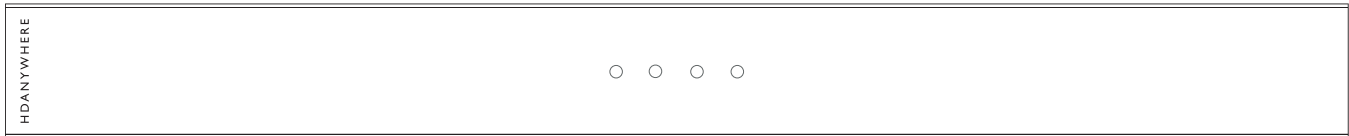

MADE IN BRITAIN

Form.

Form factor	1U 19" mountable (kit included)
Dimensions	440 / 284 / 43mm
Weight	4700g (chassis) / 5700g (package)
Material	Steel
Colour	Carbonite (grey)
Operating temp	-10 – 60C
Storage temp	-15 – 70C
Rel humidity	5% – 95% non condensing

I/O.

Inputs	3.5mm Stereo Jack (x4) Optical / Digital Coaxial (x2)
Outputs	Amplified output (x4)

Power.

Power	110-240V
Lead	IEC
Consumption	Min 14W / Max 360W


Technical.

Formats	Stereo (Input & Output)
Max input level	+12dBu (+9.8dBv)
Input gain	-14dBu – +16dBu (2dB steps)
Amp power	55W per channel at 4Ω 30W per channel at 8Ω 42W all channels driven
Output level	0dBu – -66dBu (1dB steps) -100dB mute
Max output level	-72dB – 0dB +16dBu (+14dBv) (lineout)
Balance	+/- 6dB (1 dB steps)

EQ.

Treble	+/- 14dB @ 10KHz
Mid	+/- 14dB @ 1KHz
Bass	+/- 14dB @ 100Hz

Third-party control.



Directly integrates with.



Wiring up.

